

MSZ-EX09NLW & SUZ-AA09NL
9,000 BTU/H WALL-MOUNTED INDOOR UNIT
9,000 BTU/H HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



INDOOR Unit ... MSZ-EX09NLW
OUTDOOR Unit ... SUZ-AA09NL

INDOOR UNIT FEATURES

- **Econo Cool:** Econo Cool is feature that temporarily adjusts the airflow to maintain comfort while using less energy.
- **Swing Mode:** An indoor unit with this capability can move air throughout the room like an oscillating fan.
- **Smart Set:** Smart Set conveniently adjusts to the preferred preset temperature by pressing a single button on the remote control.
- **Dual Barrier Coating:** Dual Barrier Coating reduces the collection of contaminants like dust, fibers, smoke, and oil on the inner surface of the indoor unit.
- **Quiet:** Outdoor units are as quiet as a typical conversation, and most indoor units are whisper quiet.
- **Electrostatic Enzyme Filter (Built-In):** Charged with static electricity, the Electrostatic filter is designed to attract and filter charged particles which can include airborne non-living particulates.

OUTDOOR UNIT FEATURES

- **Inverter Driven Compressor:** Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- **Blue Fin Coating:** Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- **Seacoast Protection:** An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.

SPECIFICATIONS: MSZ-EX09NLW & SUZ-AA09NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	9000
	Rated Capacity	Btu/h	9000
	Minimum Capacity	Btu/h	2300
	Maximum Power Input	W	700
	Rated Power Input	W	700
	Moisture Removal	Pints/h	0.20
	Sensible Heat Factor		0.97
Heating at 47F ²	Power Factor [208V / 230V]	%	91 / 91
	Maximum Capacity	Btu/h	13000
	Rated Capacity	Btu/h	12000
	Minimum Capacity	Btu/h	5300
	Maximum Power Input	W	910
	Rated Power Input	W	800
Heating at 17F ³	Power Factor [208V / 230V]	%	94 / 94
	Maximum Capacity	Btu/h	7700
	Rated Capacity	Btu/h	7700
	Maximum Power Input	W	660
Heating at 5F ⁵	Rated Power Input	W	660
	Maximum Capacity	Btu/h	6200
Heating at -4F ⁶	Maximum Power Input	W	605
Efficiency	Maximum Capacity	Btu/h	5200
	SEER2		21.70
	EER2 ¹		12.80
	HSPF2 [IV]		12.90
	COP at 47°F ²		4.30
	COP at 17°F at Maximum Capacity ³		3.40
	COP at 5°F at Maximum Capacity ⁵		3.00
Electrical	COP at -4°F at Maximum Capacity ⁶		2.62
	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
Indoor Unit	Recommended Fuse/Breaker Size (Outdoor)	A	15
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	Fan Motor Output	W	30
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	143 , 164 , 228 , 305 , 391
	Airflow Rate at Cooling, Wet	CFM	128 , 147 , 205 , 274 , 352
	Airflow Rate at Heating, Dry	CFM	143 , 164 , 205 , 244 , 448
	Sound Pressure Level [Cooling]	dB (A)	21 , 23 , 29 , 36 , 42
	Sound Pressure Level [Heating]	dB (A)	21 , 24 , 29 , 37 , 45
	Drain Pipe Size O.D.	inch [mm]	5/8 [16]
	Dual Barrier Coating on Heat Exchanger		Yes
	Dual Barrier Coating on Fan		Yes
	External Finish Color		0.7PB 9.2/0.4
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	34-13/16 x 7-11/16 x 11-3/4 [885 x 195 x 299]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	35-5/8 x 14-3/16 x 10-11/16 [980 x 360 x 270]
	Unit Weight	lbs [kg]	26 [11.50]
	Package Weight	lbs [kg]	29 [13]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50
Outdoor Unit	MCA	A	13
	MOCP	A	22

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

SPECIFICATIONS: MSZ-EX09NLW & SUZ-AA09NL

Outdoor Unit	Fan Motor Output	W	55
	Airflow Rate Cooling	CFM	1229
	Airflow Rate Heating	CFM	1172
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	48
	Sound Pressure Level, Heating ²	dB (A)	50
	Compressor Type		Twin Rotary
	Compressor Model		SRB092FQFMC
	Compressor Oil [Type // Charge]	// oz	RM68EH // 11.8
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Optional
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	31-1/2 x 11-1/4 x 21-5/8 [800 x 285 x 550]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	37-1/16 x 15 x 24-13/16 [940 x 380 x 630]
ODU Operating Temp. Range	Unit Weight	lbs [kg]	81 [37]
	Package Weight	lbs [kg]	88.18 [40]
	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	70 , 65 / -4 , -5
Refrigerant	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-14 / -4
	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	2 ,
	Maximum Pre-Charged Piping Length	ft [m]	65 [7.60]
Piping	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0
	Gas Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
	Maximum Piping Length	ft [m]	65 [20]
	Maximum Height Difference	ft [m]	40 [12]
	Maximum Number of Bends		10
		inch	0

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB


INDOOR UNIT ACCESSORIES: MSZ-EX09NLW

Condensate	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐ X87-711
	REFCO PUMP 100-240 VAC 5060 HZ	☐ X86-011
	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	☐ X88-721
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
	Sauermann Condensate Pump	☐ SI30-230
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	☐ X86-003
	Refco Condensate Pump 100-240 VAC	☐ GOBI-II
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	☐ COMBI
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	☐ X87-835
	Drain Pan Level SensorControl	☐ SS610E
Control Interface	Procon BACnet and Modbus Interface	☐ PAC-UKPRC001-CN-1
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
	M-NET adapter ²	☐ MAC-334IF-E
	Wireless Interface Adapter for the Comfort app	☐ PAC-USWHS002-WF-2
	Airzone Wireless Lite Controller White	☐ AZZBSLITERB
	IT Extender for kumo station	☐ PAC-WHS01IE-E
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
	kumo station for the Comfort app	☐ PAC-WHS01HC-E
	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	☐ TAZ-MS303W
Drain Hose	Flexible Mini-Split Drain Hose	☐ DRX-16
Filter	Microparticle Filter	☐ MAC-EMF515FT-E
	Electro Static Anti-allergy Enzyme Filter	☐ MAC-2320FT-E
Lineset	50 x 1/4 x 50 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-50
	65 x 1/4 x 65 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-65
	30 x 1/4 x 30 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-30
	15 x 1/4 x 15 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-15
Remote Sensor	Remote Temperature Sensor for MFZ MLZ and MSZ models	☐ M21EAA307
	Wireless temperature and humidity sensor for the Comfort app	☐ PAC-USWHS003-TH-1
Terminal Signal Adapter	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	☐ CN24RELAY-KIT-CM3
Wired Remote Controller	Simple MA Remote Controller ¹	☐ PAC-YT53CRAU-J
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
	Deluxe Wired MA Remote Controller ¹	☐ PAR-42MAAUB
	Touch MA Wired Remote Controller ¹	☐ PAR-CT01MAU-SB
Wireless Remote Controller	RedLINK Wireless Remote Controller	☐ MHK2
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB
Notes ² Allows IDU Connection to MA Controller: *Deluxe MA Remote Controller *Simple MA Controller *Touch MA Controller ¹ Requires MAC-334IF-E Interface to connect MA controller		

OUTDOOR UNIT ACCESSORIES: SUZ-AA09NL

Air Outlet Guide	Air Outlet Guide	☐	MAC-881SG-E
Centralized Drain Pan	Centralized Drain Pan	☐	PAC-SG63DP-E
Control/Service Tool	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
Drain Socket	Drain Socket	☐	MAC-871DS
Hail Guards	Hail Guard	☐	HG-B4
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	☐	ULTRILITE1
Muffler	Muffler	☐	MAC-001MF-E
Optional Defrost Heater	Base Heater	☐	MAC-650BH-U
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-1
Stand	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	18 Single Fan Stand	☐	QSMS1801M
	Condenser Wall Bracket	☐	QSWB2000M-1
	24 Single Fan Stand	☐	QSMS2401M
	Outdoor Unit Stand 12 High	☐	QSMS1201M
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
Notes			

INDOOR UNIT DIMENSIONS: MSZ-EX09NLW

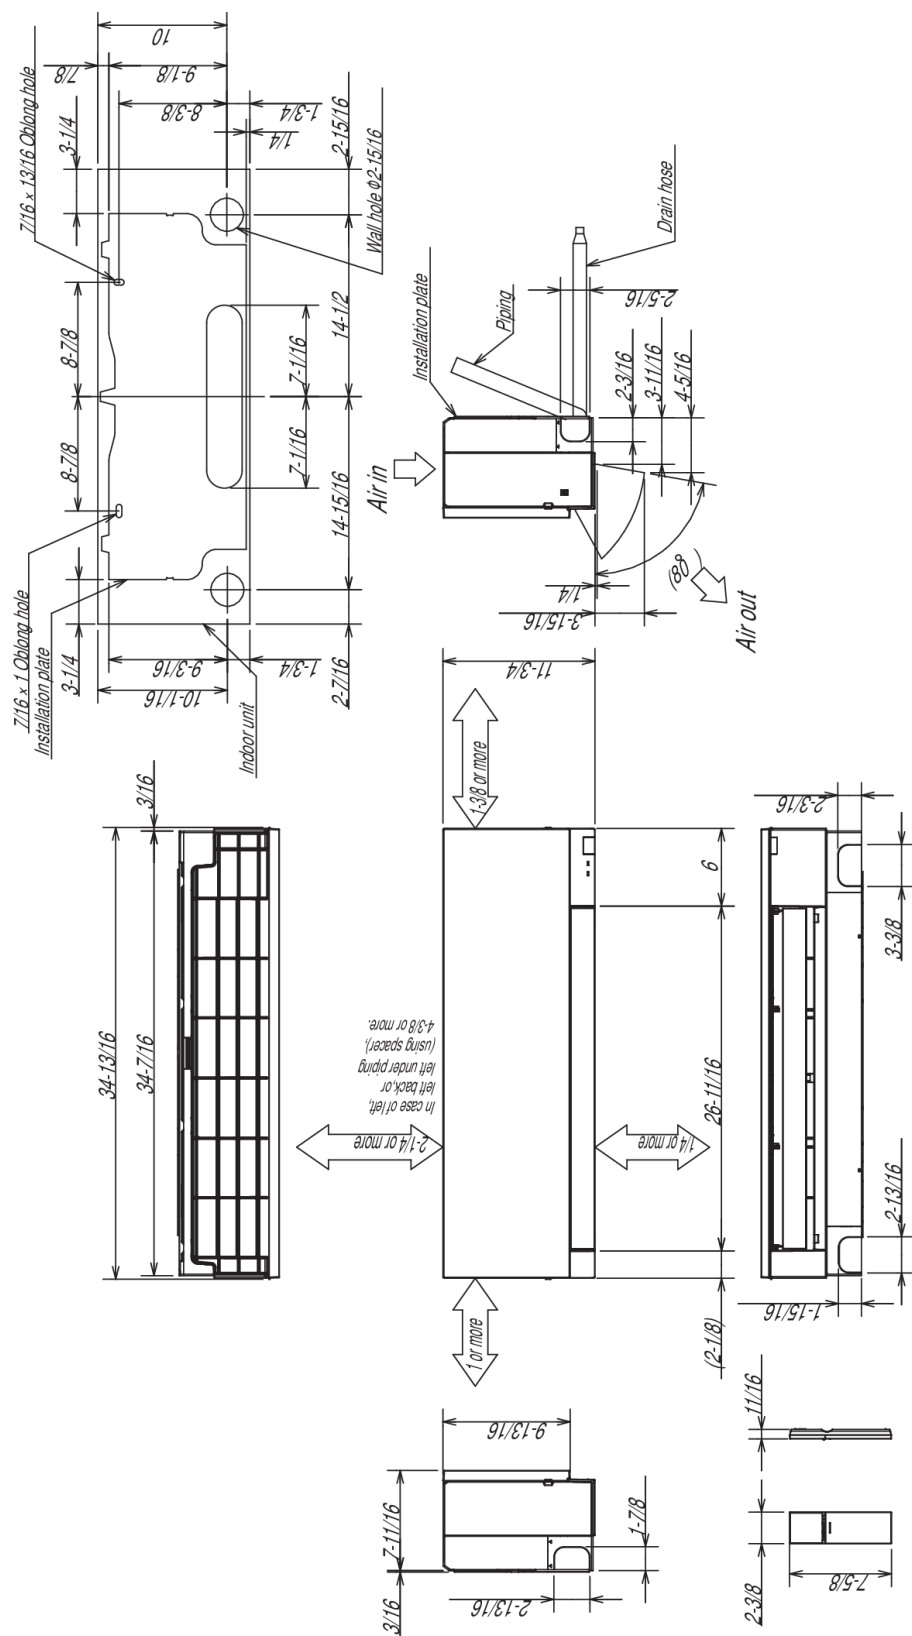

MSZ-EX15/18NL



Piping	Insulation	φ1-7/16 O.D
	Liquid line	φ1/4 - 19-11/16 (Flared connection φ1/4)
	Gas line	φ3/8 - 16-15/16 (Flared connection φ1/2)
	Drain hose	Insulation φ1/8 Connected part φ5/8 O.D active length 15-3/8

Note: Extension pipe size refer to the specifications table.


OUTDOOR UNIT DIMENSIONS: SUZ-AA09NL

REQUIRED SPACE

*1 4 in. (100 mm) or more when front and sides of the unit are clear

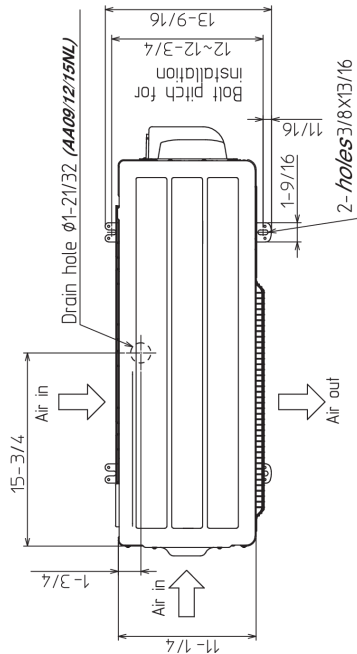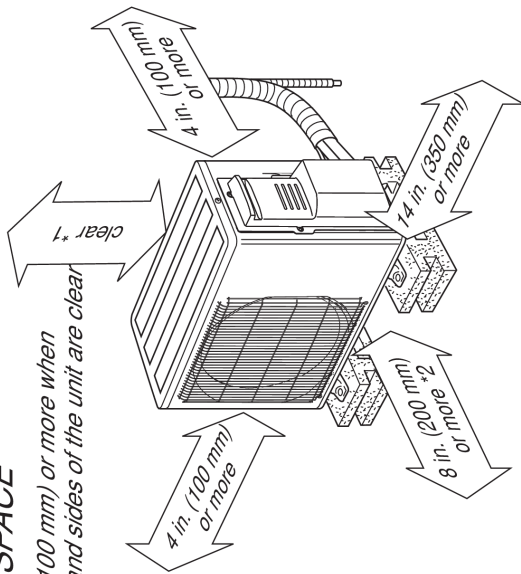

Drain hole ϕ 1-5/16 (KA09/12/15NAH)

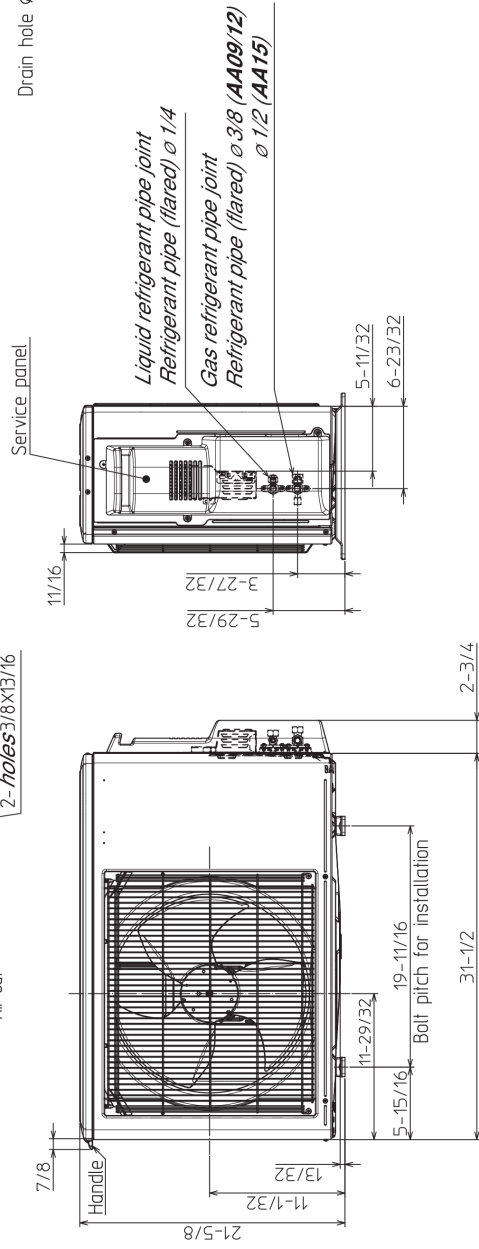

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-07_PROPIN

