

MSZ-EX12NLW & SUZ-AA12NLHZ
12,000 BTU/H WALL-MOUNTED INDOOR UNIT
12,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



INDOOR Unit ... MSZ-EX12NLW

OUTDOOR Unit ... SUZ-AA12NLHZ

INDOOR UNIT FEATURES

- Econo Cool: Econo Cool is feature that temporarily adjusts the airflow to maintain comfort while using less energy.
- Swing Mode: An indoor unit with this capability can move air throughout the room like an oscillating fan.
- Smart Set: Smart Set conveniently adjusts to the preferred preset temperature by pressing a single button on the remote control.
- Dual Barrier Coating: Dual Barrier Coating reduces the collection of contaminants like dust, fibers, smoke, and oil on the inner surface of the indoor unit.
- Quiet: Outdoor units are as quiet as a typical conversation, and most indoor units are whisper quiet.
- Electrostatic Enzyme Filter (Built-In): Charged with static electricity, the Electrostatic filter is designed to attract and filter charged particles which can include airborne non-living particulates.

OUTDOOR UNIT FEATURES

- H2i® Hyper-Heating: 100% heating capacity down to 5° F .
- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Base Pan Heater: This advanced base pan heater helps to prevent interrupted operation due to water freezing after a defrost cycle, ensuring your warmth and comfort during colder weather.
- Seacoast Protection: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.

SPECIFICATIONS: MSZ-EX12NLW & SUZ-AA12NLHZ

Cooling at 95F ¹	Maximum Capacity	Btu/h	12000
	Rated Capacity	Btu/h	12000
	Minimum Capacity	Btu/h	4800
	Maximum Power Input	W	850
	Rated Power Input	W	850
	Moisture Removal	Pints/h	1.90
	Sensible Heat Factor		0.82
Heating at 47F ²	Power Factor [208V / 230V]	%	99 / 99
	Maximum Capacity	Btu/h	18000
	Rated Capacity	Btu/h	15000
	Minimum Capacity	Btu/h	8300
	Maximum Power Input	W	1490
	Rated Power Input	W	1150
Heating at 17F ³	Power Factor [208V / 230V]	%	95 / 95
	Maximum Capacity	Btu/h	15000
	Rated Capacity	Btu/h	9400
	Maximum Power Input	W	1670
Heating at 5F ⁵	Rated Power Input	W	1040
	Maximum Capacity	Btu/h	15000
Heating at -13F ⁹	Maximum Power Input	W	2198
Efficiency	Maximum Capacity	Btu/h	9100
	SEER2		17.60
	EER2 ¹		14.10
	HSPF2 [IV]		10
	COP at 47°F ²		3.80
	COP at 17°F at Maximum Capacity ³		2.60
	COP at 5°F at Maximum Capacity ⁵		2.00
Electrical	COP at -13°F at Maximum Capacity ⁹		1.63
	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC , ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
Indoor Unit	Recommended Fuse/Breaker Size (Outdoor)	A	30
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	Fan Motor Output	W	30
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	143 , 164 , 228 , 305 , 391
	Airflow Rate at Cooling, Wet	CFM	128 , 147 , 205 , 274 , 352
	Airflow Rate at Heating, Dry	CFM	143 , 164 , 205 , 244 , 479
	Sound Pressure Level [Cooling]	dB (A)	21 , 24 , 29 , 36 , 42
	Sound Pressure Level [Heating]	dB (A)	21 , 24 , 30 , 38 , 46
	Drain Pipe Size O.D.	inch [mm]	5/8 [16]
	Dual Barrier Coating on Heat Exchanger		Yes
	Dual Barrier Coating on Fan		Yes
	External Finish Color		0.7PB 9.2/0.4
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	34-13/16 x 7-11/16 x 11-3/4 [885 x 195 x 299]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	35-5/8 x 14-3/16 x 10-11/16 [980 x 360 x 270]
IDU Operating Temp. Range	Unit Weight	lbs [kg]	26 [11.50]
	Package Weight	lbs [kg]	29 [13]
Outdoor Unit	Cooling Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50
MCA	MCA	A	25
	MOCP	A	42

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

⁹Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB

^{*}Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

^{**}Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

SPECIFICATIONS: MSZ-EX12NLW & SUZ-AA12NLHZ

Outdoor Unit	Fan Motor Output	W	50
	Airflow Rate Cooling	CFM	2193
	Airflow Rate Heating	CFM	1949
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	54
	Sound Pressure Level, Heating ²	dB (A)	55
	Compressor Type		Twin Rotary
	Compressor Model		SRB172FQHMT
	Compressor Oil [Type // Charge]	// oz	RM68EH // 14.54
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 13 x 34-5/8 [840 x 330 x 880]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-5/8 x 16-9/16 x 39 [980 x 420 x 990]
ODU Operating Temp. Range	Unit Weight	lbs [kg]	115 [52.16]
	Package Weight	lbs [kg]	133 [60.33]
	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
	Heating Intake Air Temp [Maximum / Minimum]	°FDB , °FWB / °FDB , °FWB	70 , 65 / -13 , -14
Refrigerant	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-22.5 / -14
	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	3 ,
	Maximum Pre-Charged Piping Length	ft [m]	25 [7.60]
Piping	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.22
	Gas Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
	Maximum Piping Length	ft [m]	100 [30]
	Maximum Height Difference	ft [m]	50 [15]
	Maximum Number of Bends		10
		inch	0

Notes

¹Cooling at 95°F (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

⁹Heating at -13°F (Indoor // Outdoor) °F 70 DB, 60 WB // -13 DB, -14 WB

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

INDOOR UNIT ACCESSORIES: MSZ-EX12NLW

Condensate	Refco Condensate Pump 100-240 VAC	☐ GOBI-II
	Blue Diamond Sensor Extension Cable 15 Ft	☐ C13-103
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	☐ X87-711
	REFCO PUMP 100-240 VAC 5060 HZ	☐ X86-011
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	☐ COMBI
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	☐ X86-003
	Drain Pan Level SensorControl	☐ SS610E
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	☐ X87-835
	Sauermann Condensate Pump	☐ SI30-230
	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	☐ X88-721
Control Interface	IT Extender for kumo station	☐ PAC-WHS01IE-E
	Thermostat Interface for 3rd Party Thermostats	☐ PAC-US445CN-1
	Airzone Wireless Lite Controller Black	☐ AZZBSLITERN
	M-NET adapter ²	☐ MAC-334IF-E
	Airzone Wired Blueface Controller White	☐ AZZBSBLUEZEROCB
	Airzone Wireless Lite Controller White	☐ AZZBSLITERB
	Airzone Wireless Think Controller Black	☐ AZZBSTHINKRN
	Wireless Interface Adapter for the Comfort app	☐ PAC-USWHS002-WF-2
	Airzone Wired Blueface Controller Black	☐ AZZBSBLUEZEROCN
	kumo station for the Comfort app	☐ PAC-WHS01HC-E
	Airzone Wireless Think Controller White	☐ AZZBSTHINKRB
	Procon BACnet and Modbus Interface	☐ PAC-UKPRC001-CN-1
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	☐ TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	☐ TAZ-MS303W
Drain Hose	Flexible Mini-Split Drain Hose	☐ DRX-16
Filter	Electro Static Anti-allergy Enzyme Filter	☐ MAC-2320FT-E
	Microparticle Filter	☐ MAC-EMF515FT-E
Lineset	65 x 1/4 x 65 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-65
	15 x 1/4 x 15 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-15
	30 x 1/4 x 30 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-30
	50 x 1/4 x 50 3/8 Lineset Twin-Tube Insulation	☐ MLS143812T-50
Remote Sensor	Remote Temperature Sensor for MFZ MLZ and MSZ models	☐ M21EAA307
	Wireless temperature and humidity sensor for the Comfort app	☐ PAC-USWHS003-TH-1
Terminal Signal Adapter	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	☐ CN24RELAY-KIT-CM3
Wired Remote Controller	Simple MA Remote Controller ¹	☐ PAC-YT53CRAU-J
	Simple Direct Wired Remote Controller	☐ PAC-SDW01RC-1
	Touch MA Wired Remote Controller ¹	☐ PAR-CT01MAU-SB
	Deluxe Wired MA Remote Controller ¹	☐ PAR-42MAAUB
Wireless Remote Controller	RedLINK Wireless Remote Controller	☐ MHK2
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐ RCMKP1CB

Notes


¹Requires MAC-334IF-E Interface to connect MA controller

²Allows IDU Connection to MA Controller: ^{*}Deluxe MA Remote Controller ^{*}Simple MA Controller ^{*}Touch MA Controller

OUTDOOR UNIT ACCESSORIES: SUZ-AA12NLHZ

Air Outlet Guide	Air Outlet Guide	☐	MAC-890SG-E
Control/Service Tool	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
	Maintenance Tool Interface	☐	PAC-USCMS-MN-1
Drain Socket	Drain Socket	☐	MAC-871DS
Hail Guards	Hail Guard	☐	HG-A7
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	☐	ULTRILITE1
Muffler	Muffler	☐	MAC-001MF-E
Port Adaptor	Adaptor 1/2 x 3/8	☐	PAC-SK88RJ-E
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-3
Stand	Outdoor Unit Stand 12 High	☐	QSMS1201M
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Condenser Wall Bracket	☐	QSWB2000M-1
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	24 Single Fan Stand	☐	QSMS2401M
	18 Single Fan Stand	☐	QSMS1801M
Notes			

INDOOR UNIT DIMENSIONS: MSZ-EX12NLW

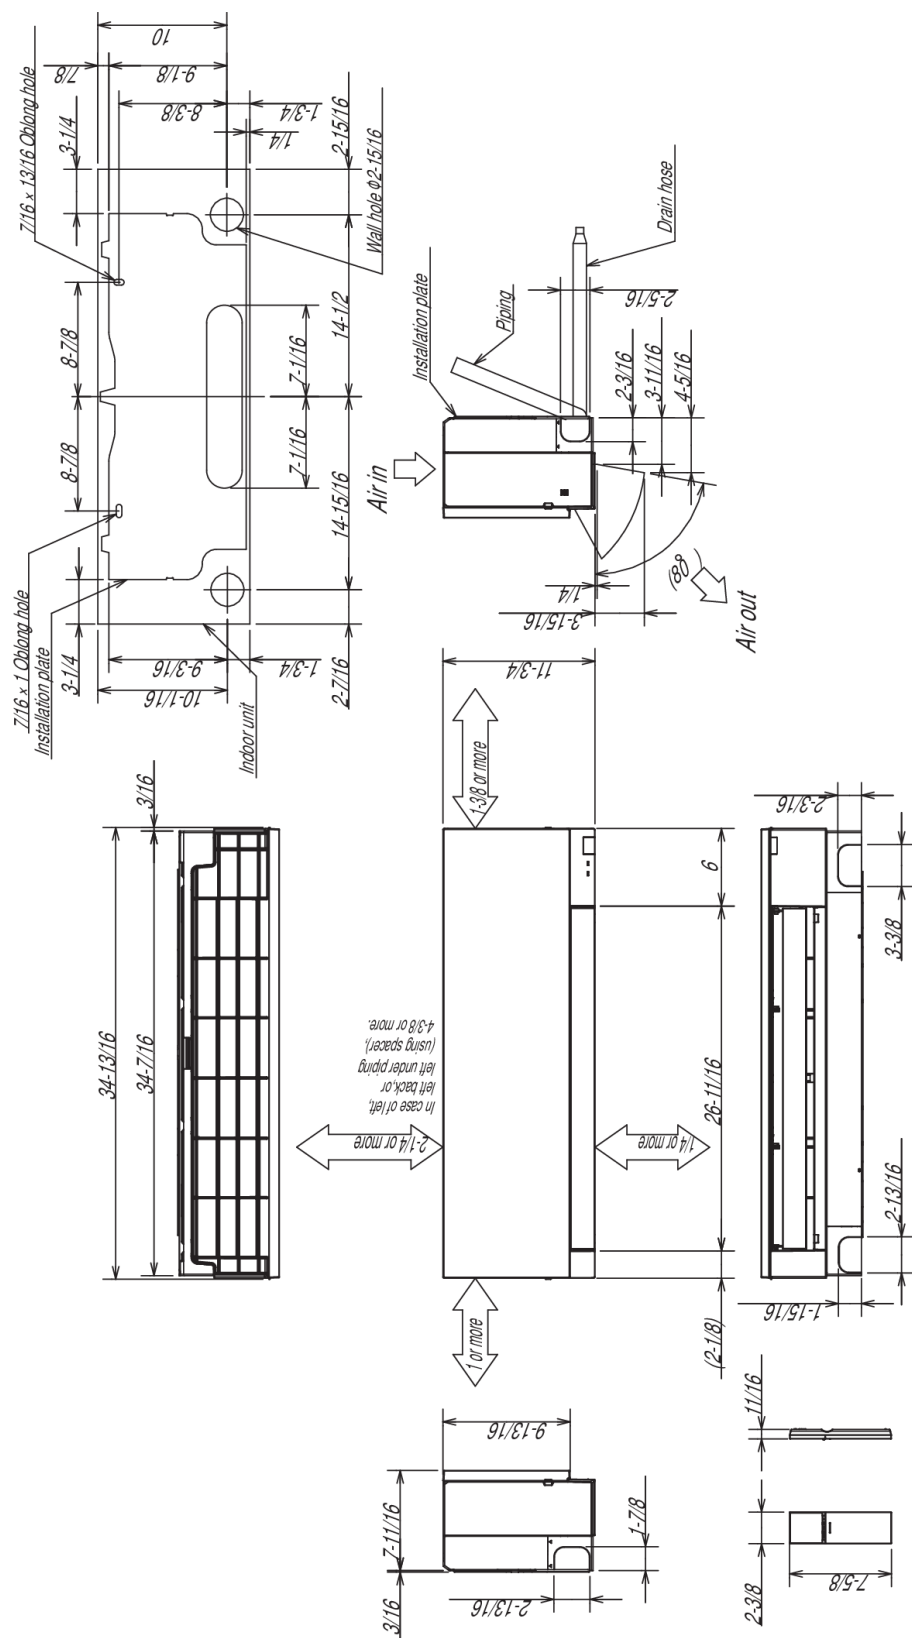


MSZ-EX15/18NL

Insulation	φ1-7/16 O.D
Liquid line	φ1/4 - 19-11/16 (Flared connection φ1/4)
Gas line	φ3/8 - 16-5/16 (Flared connection φ1/2)
Drain hose	Insulation φ1-1/8 Connected part φ5/8 O.D active length 15-3/8

Note: Extension pipe size refer to the specifications table.

OUTDOOR UNIT DIMENSIONS: SUZ-AA12NLHZ

REQUIRED SPACE

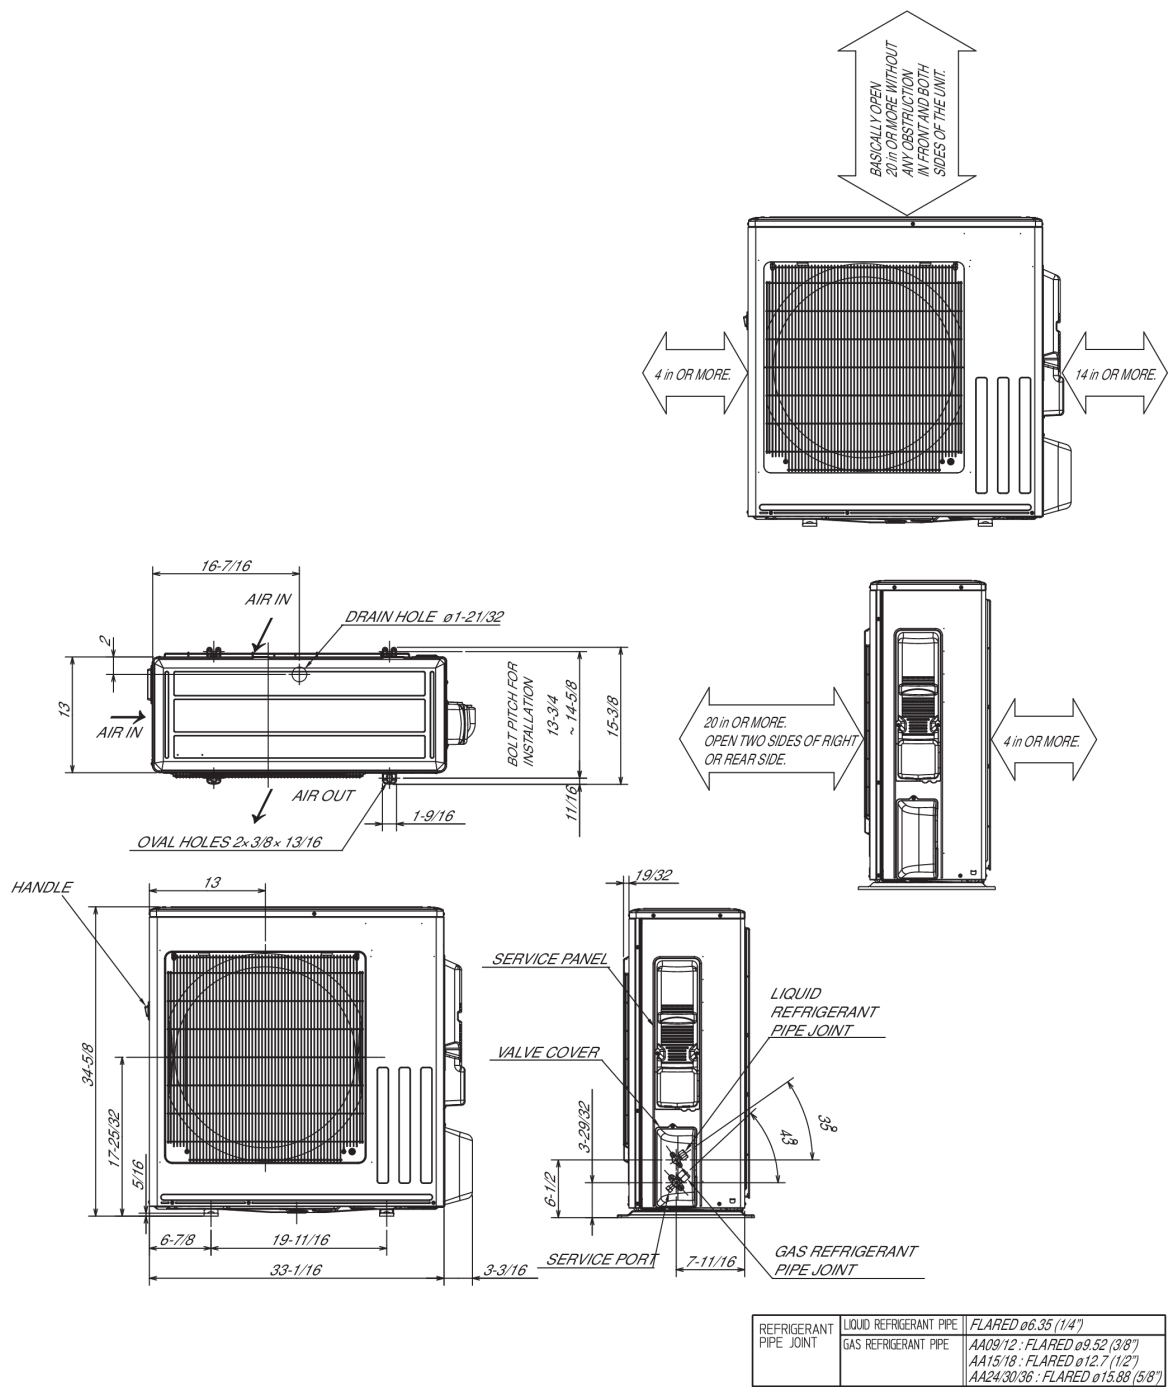

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-07_PROPIN

