

MSZ-JX12WL & MUZ-JX12WL
12,000 BTU/H WALL-MOUNTED INDOOR UNIT
12,000 BTU/H INVERTER HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



Indoor Unit.....MSZ-JX12WL

Outdoor Unit.....MUZ-JX12WL



INDOOR UNIT FEATURES

- 115V
- 12-hour timer
- Dual Barrier Coating: The patented Dual Barrier Coating reduces the collection of contaminants like dust, fibers, smoke, and oil on the inner surface of the heat pump, resulting in optimal airflow and easier maintenance.
- Econo Cool: Econo Cool temporarily and automatically adjusts the airflow based on heat exchanger temperature. The set temperature is increased slightly, which saves energy, while maintaining comfort.
- Four fan speed options: Low, Medium, high, Super-high
- Multiple control options including: Back-lit screen hand-held Remote Controller (provided with unit), comfort app, third-party interfaces and both wired and wireless controllers
- Smart Dry Mode: Improves humidity control with minimal over-cooling of the space

OUTDOOR UNIT FEATURES

- Blue Fin Coating: An anti-corrosion treatment applied to the aluminum fins of the heat exchanger of the outdoor unit to protect against corrosion caused by salt, sulfur, and other airborne contaminants, especially in coastal and industrial areas.
- INVERTER-driven compressor: An inverter-driven compressor generates the precise capacity needed to maintain a temperature set point.

SPECIFICATIONS: MSZ-JX12WL & MUZ-JX12WL

Cooling at 95F ¹	Maximum Capacity	Btu/h	13,400
	Rated Capacity	Btu/h	12,000
	Minimum Capacity	Btu/h	3,600
	Maximum Power Input	W	1,430
	Rated Power Input	W	960
	Moisture Removal	Pints/h	2
	Sensible Heat Factor	-	0.82
Heating at 47F ²	Power Factor [208V / 230V]	%	98 / 98
	Maximum Capacity	Btu/h	15,500
	Rated Capacity	Btu/h	12,200
	Minimum Capacity	Btu/h	4,500
	Maximum Power Input	W	2,140
	Rated Power Input	W	990
	Power Factor [208V / 230V]	%	100 / 100
Heating at 17F ³	Maximum Capacity	Btu/h	9,000
	Rated Capacity	Btu/h	7,800
	Maximum Power Input	W	1,670
	Rated Power Input	W	900
Heating at 5F ⁴	Maximum Capacity	Btu/h	8,600
Heating at -5F ⁵	Maximum Power Input	W	1,400
	Maximum Capacity	Btu/h	8,300
Efficiency	SEER2		20
	EER2 ¹		12.5
	HSPF2 [IV]		10
	COP at 47°F ²		3.61
	COP at 17°F at Maximum Capacity ³		1.56
	COP at 5°F at Maximum Capacity ⁴		1.8
	COP at -5°F at Maximum Capacity ⁵		1.76
Electrical	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC, ø, Hz	115 / 115, 1, 60
	Guaranteed Voltage Range	V AC	103 - 127
	Voltage: Indoor - Outdoor, S1-S2	V AC	115
	Voltage: Indoor - Outdoor, S2-S3	V DC	24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	20
Indoor Unit	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	MCA	A	1.4
	Fan Motor Output	W	30
	Airflow Rate at Cooling, Dry	CFM	168, 243, 333, 468
	Airflow Rate at Cooling, Wet	CFM	151, 219, 300, 422
	Airflow Rate at Heating, Dry	CFM	173, 239, 343, 395
	Sound Pressure Level [Cooling]	dB (A)	22, 30, 38, 47
	Sound Pressure Level [Heating]	dB (A)	23, 30, 38, 43
	Drain Pipe Size O.D.	inch [mm]	5/8 [15.88]
	External Finish Color		Munsell 0.7PB 9.2/0.4
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33 x 9-1/4 x 11-1/32 [838 x 235 x 280]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	36 x 13-1/4 x 11-1/2 [920 x 340 x 300]
	Unit Weight	lbs [kg]	20 [9]
	Package Weight	lbs [kg]	24 [10.50]
	Fan Motor Type		DC Motor
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	90, 73 / 67, 57
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	80 / 70

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -5°F (Indoor: 70°F DB, 60°F WB // Outdoor: -5°F DB, -6°F WB)

^{*} Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

^{**} Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.

SPECIFICATIONS: MSZ-JX12WL & MUZ-JX12WL

Outdoor Unit	MCA	A	17
	MOCP	A	20
	Fan Motor Full Load Amperage	A	0.5
	Fan Motor Output	W	55
	Airflow Rate Cooling	CFM	1,344
	Airflow Rate Heating	CFM	1,152
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes, Yes
	Sound Pressure Level, Cooling ¹	dB (A)	49
	Sound Pressure Level, Heating ²	dB (A)	51
	Compressor Type		Twin Rotary
	Compressor Model		SRB140FQHMC
	Compressor Oil [Type // Charge]	Type // oz	RM68EH // 11.8
	External Finish Color		Munsell 3Y 7.8/1.1
	Base Pan Heater		Optional
ODU Operating Temp. Range	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	31-1/2 x 11-1/4 x 21-5/8 [800 x 285 x 550]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	38-3/4 x 16-3/4 x 40-3/4 [980 x 420 x 1,030]
	Unit Weight	lbs [kg]	82 [36.9]
	Package Weight	lbs [kg]	89 [40.3]
	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures**	°FDB	-1 / 3
Refrigerant	Heating Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	75, 65 / -5, -6
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-14 / -4
	Type		R454B
	Pre-Charged Refrigerant Amount	lbs, oz	2, 2
	Maximum Pre-Charged Piping Length	ft [m]	25 [7.50]
Piping	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.22
	Gas Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	1/4 [6.35]
	Maximum Piping Length	ft [m]	65 [20]
	Maximum Height Difference	ft [m]	40 [12]
Maximum Number of Bends			10
NOTES ¹ Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB) ² Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB) ³ Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB) ⁴ Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB) ⁵ Heating at -5°F (Indoor: 70°F DB, 60°F WB // Outdoor: -5°F DB, -6°F WB) * Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions. ** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.			


INDOOR UNIT ACCESSORIES: MSZ-JX12WL

Power Supplies and Auxiliary Components	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	CN24RELAY-KIT-CM3
Wired Remote Controller	Deluxe Wired MA Remote Controller	PAR-42MAAUB
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller ¹	PAC-YT53CRAU-J
	Touch MA Wired Remote Controller ¹	PAR-CT01MAU-SB
Condensate	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	X87-721
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	X87-835
	Blue Diamond MicroBlue Mini Condensate Pump 110208230V up to 18000 BTUH	X86-003
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Drain Pan Level SensorControl	SS610E
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	COMBI
	Refco Condensate Pump 100-240 VAC	GOBI-II
	REFCO PUMP 100-240 VAC 5060 HZ	X86-011
	Sauermann Condensate Pump	SI30-230
Control Interface	Airzone Wired Blueface Controller Black	AZZBSBLUEZEROCN
	Airzone Wired Blueface Controller White	AZZBSBLUEZEROCB
	Airzone Wireless Lite Controller Black	AZZBSLITERN
	Airzone Wireless Lite Controller White	AZZBSLITERB
	Airzone Wireless Think Controller Black	AZZBSTHINKRN
	Airzone Wireless Think Controller White	AZZBSTHINKRB
	IT Extender for kumo station	PAC-WHS01IE-E
	kumo station for the Comfort app	PAC-WHS01HC-E
	M-Net I/O Control Interface for M-Series ²	MAC-334IF-E
	Procon BACnet and Modbus Interface	PAC-UKPRC001-CN-1
	Thermostat Interface for 3rd Party Thermostats	PAC-US445CN-1
	Wireless Interface Adapter for the Comfort app	PAC-USWHS002-WF-2
Filter	Electro Static Anti-allergy Enzyme Filter	MAC-2320FT-E
	Microparticle Filter	MAC-EMF515FT-E
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	RedLINK Wireless Remote Controller	MHK2
Lineset	15 x 1/4 x 15 3/8 Lineset Twin-Tube Insulation	MLS143812T-15
	30 x 1/4 x 30 3/8 Lineset Twin-Tube Insulation	MLS143812T-30
	50 x 1/4 x 50 3/8 Lineset Twin-Tube Insulation	MLS143812T-50
	65 x 1/4 x 65 3/8 Lineset Twin-Tube Insulation	MLS143812T-65
Remote Sensor	Remote Temperature Sensor for MFZ MLZ and MSZ models	M21EAA307
	Wireless temperature and humidity sensor for the Comfort app	PAC-USWHS003-TH-1
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	TAZ-MS303W
Drain Hose	Flexible Mini-Split Drain Hose	DRX-16
NOTES ¹Requires MAC-334IF-E Interface to connect MA controller ¹Requires MAC-334IF-E Interface to connect MA controller ¹Requires MAC-334IF-E Interface to connect MA controller ¹Requires MAC-334IF-E Interface to connect MA controller ²Allows IDU Connection to MA Controller: Deluxe MA Remote Controller Simple MA Controller Touch MA Controller		

OUTDOOR UNIT ACCESSORIES: MUZ-JX12WL

Hail Guards	Hail Guard	HG-B4
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	ULTRILITE1
Stand	18 Single Fan Stand	QSMS1801M
	24 Single Fan Stand	QSMS2401M
	Condenser Wall Bracket - Stainless Steel Finish	QSWBSS
	Condenser Wall Bracket	QSWB2000M-1
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	DSD-400P
	Outdoor Unit Stand 12 High	QSMS1201M
Drain Socket	Drain Socket	MAC-871DS
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	SW144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	S144-50
Snow/Rain Diverter	SnowRain Diverter	SRD-1
Air Outlet Guide	Air Outlet Guide	MAC-881SG-E
Control/Service Tool	M- & P-Series Maintenance Tool Cable Set	M21EC0397
	Maintenance Tool Interface	PAC-USCMS-MN-1
NOTES		

MSZ-JX09WL- U1
MSZ-JX12WL- U1



REMOCON	
---------	--




Technical drawing of a rectangular box with dimensions and labels. The drawing shows a side view of the box with a lid. The dimensions are as follows:

- Overall width: 4-3/8
- Overall height: 26-11/16
- Internal width: 1-31/32
- Internal height: 3-7/32
- Bottom flange width: 2-17/32
- Bottom flange height: 1-1/16
- Bottom flange depth: 1-1/16

The drawing includes a small square feature on the top surface and a small rectangular feature on the side surface.

MUZ-JX09WL-U1
MUZ-JX12WL-U1
MUZ-JX09WLH-U1
MUZ-JX12WLH-U1

*1 4 in. (100 mm) or more when front and sides of the unit are clear

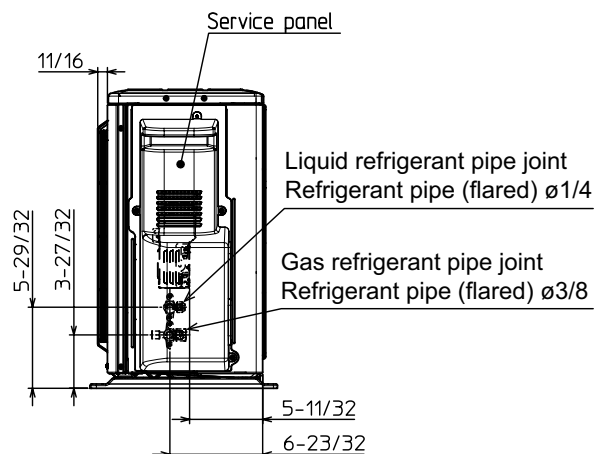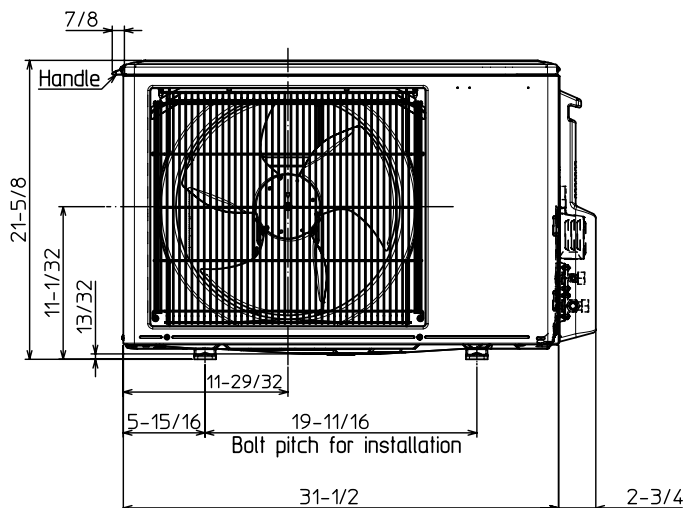

REFRIGERANT PIPE JOINT	LIQUID REFRIGERANT PIPE	FLARED 1/4"
	GAS REFRIGERANT PIPE	FLARED 3/8"

© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

