

PAA-AA18NL & PUZ-AK24NLHZ
18,000 BTU/H CASED COIL INDOOR UNIT
18,000 BTU/H HYPER HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



Indoor Unit.....PAA-AA18NL

Outdoor Unit.....PUZ-AK24NLHZ



INDOOR UNIT FEATURES

- Available Widths: Available in 14.5", 17.5", and 21" widths
- Control Compatibility: Compatible with any thermostatically controlled (24VAC) natural gas or LP furnace*
- Flared piping connection
- Furnace Compatible: Compatible with any thermostatically controlled gas furnace, intelli-HEAT® allows for Intelligent Switchover between the furnace and heat pump.*

*Mitsubishi Electric air-conditioner and heat pump systems should only be connected with ANSI-Z21.47/CSA2.3 certified furnaces

- High quality drain pan: High quality drain pan material with high heat tolerance and low moisture absorption
- Included components: Includes cased coil and control box
- Intelligent Switchover: The intelli-HEAT® Intelligent Switchover function automatically switches from the all-electric heat pump heating to the gas furnace based on the ambient temperature to optimize economic and lower carbon footprint priorities. When indoor temperatures are not maintained for 24-29 minutes due to extreme cold, the system switches to the gas furnace heating automatically to ensure consistent comfort.
- Multi-position installation: Versatile installation options, including horizontal (left or right) and vertical (up or down) orientations, with included drain pans to facilitate easy setup for any configuration.
- Multi-zone: A multi-zone unit provides the temperature management of multiple zones within a building.
- Multiple control options, including the comfort app for remote access, third-party interfaces, and both wired and wireless controllers
- Optimized heat exchange: Optimized heat exchanger design for increased efficiency and longevity
- Optional humidifier control and ERV control
- Oxygen free copper coils

OUTDOOR UNIT FEATURES

- Built-in base pan heater
- High Speed Start-up: High speed heating at start up: Hyper-Heating INVERTER® reduces the time for heating at start up by about half compared to standard models
- Hyper-Heating INVERTER®: Variable speed INVERTER-driven compressor
- Pre-charged refrigerant: volume for piping length up to 100 ft
- Pressure/temp protection
- Seacoast protection: components are rated for 2,000 hours of durability under ASTM B117 testing standards, ensuring longevity in corrosive coastal environments.
- Wide Heating Range: Wide heating range: heating performance down to -13°F (average of 80% heating capacity)

SPECIFICATIONS: PAA-AA18NL & PUZ-AK24NLHZ

Cooling at 95F ¹	Maximum Capacity	Btu/h	19,000
	Rated Capacity	Btu/h	18,000
	Minimum Capacity	Btu/h	13,100
	Maximum Power Input	W	1,940
	Rated Power Input	W	1,530
	Moisture Removal	Pints/h	4.8
	Sensible Heat Factor	-	0.73
Heating at 47F ²	Power Factor [208V / 230V]	%	88 / 88
	Maximum Capacity	Btu/h	22,600
	Rated Capacity	Btu/h	22,600
	Minimum Capacity	Btu/h	12,400
	Maximum Power Input	W	2,140
	Rated Power Input	W	2,140
	Power Factor [208V / 230V]	%	91 / 91
Heating at 17F ³	Maximum Capacity	Btu/h	22,000
	Rated Capacity	Btu/h	16,500
	Maximum Power Input	W	4,070
	Rated Power Input	W	2,300
Heating at 5F ⁵	Maximum Capacity	Btu/h	22,000
	Maximum Power Input	W	3,640
Heating at -13F ⁹	Maximum Capacity	Btu/h	18,200
Efficiency	SEER2		15.9
	EER2 ¹		11.7
	HSPF2 [IV]		8.5
	COP at 47°F ²		3.1
	COP at 17°F at Maximum Capacity ³		1.5
	COP at 5°F at Maximum Capacity ⁵		1.77
	COP at -13°F at Maximum Capacity ⁹		1.68
Electrical	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC, ø, Hz	208 / 230, 1, 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	25
Indoor Unit	Recommended Wire Size [Indoor - Outdoor]	AWG	14
	MCA	A	0.2
	Rated Airflow, Dry	CFM	525
	Maximum Airflow, Dry	CFM	812
	Minimum Airflow, Dry	CFM	424
	Internal Static Pressure [at Rated CFM]	in.WG	0.1
	Drain Pipe Size O.D.	inch [mm]	3/4 [19.05]
	External Finish Color		Galvanized Steel
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	14-1/2 x 21-7/16 x 27-1/2 [368 x 543 x 697]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	17-7/16 x 25-5/16 x 33 [443 x 695 x 838]
	Unit Weight [Cased Coil Only]	lbs [kg]	49.6 [22.5]
	Control Box Weight	lbs [kg]	5.1 [2.3]
	Package Weight	lbs [kg]	71.7 [32.5]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	90, 73 / 66, 59
	Heating Intake Air Temp [Maximum / Minimum]	°FDB	83 / 50

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

^{*}Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Wind baffles required to operate below 23°F DB in cooling mode.

• Heat pump system with wind baffle: 0°F - 115°F.

• Refer to wind baffle documentation for further information.

^{**} Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.

SPECIFICATIONS: PAA-AA18NL & PUZ-AK24NLHZ

Outdoor Unit	MCA	A	24
	MOCP	A	39
	Fan Motor Output	W	74+74
	Airflow Rate Cooling	CFM	3,740
	Airflow Rate Heating	CFM	3,740
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes, Yes
	Sound Pressure Level, Cooling ¹	dB (A)	52
	Sound Pressure Level, Heating ²	dB (A)	53
	Compressor Type		Twin Rotary
	Compressor Model		MRK36FFGMC
	Compressor Oil [Type // Charge]	Type // oz	RM68EH // 45
	External Finish Color		Munsell No.3Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 14 x 52-43/64 [1,050 x 355 x 1,338]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	42-15/16 x 17-3/4 x 58-5/16 [1,090 x 450 x 1,480]
ODU Operating Temp. Range	Unit Weight	lbs [kg]	231 [105]
	Package Weight	lbs [kg]	258 [117]
	Cooling Intake Air Temp [Maximum / Minimum*]	°FDB	115 / 23
Refrigerant	Heating Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	70, 59 / -13, -13
	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-22 / -13
	Type		R454B
Piping	Pre-Charged Refrigerant Amount	lbs, oz	9, 14
	Maximum Pre-Charged Piping Length	ft [m]	100 [30]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.6
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Maximum Piping Length	ft [m]	165 [50]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Wind baffles required to operate below 23°F DB in cooling mode.

• Heat pump system with wind baffle: 0°F - 115°F.

• Refer to wind baffle documentation for further information.

** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.


INDOOR UNIT ACCESSORIES: PAA-AA18NL

Lineset	10 x 3/8 x 10 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-10
	100 x 1/4 x 100 1/2 Lineset Twin-Tube Insulation	MLS141212T-100
	100 x 3/8 x 100 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-100
	15 x 1/4 x 15 1/2 Lineset Twin-Tube Insulation	MLS141212T-15
	15 x 3/8 x 15 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-15
	30 x 1/4 x 30 1/2 Lineset Twin-Tube Insulation	MLS141212T-30
	30 x 3/8 x 30 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-30
	50 x 1/4 x 50 1/2 Lineset Twin-Tube Insulation	MLS141212T-50
	50 x 3/8 x 50 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-50
	65 x 1/4 x 65 1/2 Lineset Twin-Tube Insulation	MLS141212T-65
	65 x 3/8 x 65 x 5/8 Lineset Twin-Tube Insulation	MPLS385812T-65
Control Interface	IT Extender for kumo station	PAC-WHS01IE-E
	kumo station for the Comfort app	PAC-WHS01HC-E
	Operation and Error Status Output Adapter ¹	PAC-SF40RM-E
	Procon BACnet and Modbus Interface	PAC-UKPRC001-CN-1
	Thermostat Interface for 3rd Party Thermostats	PAC-US445CN-1
	Wireless Interface Adapter for the Comfort app	PAC-USWHS002-WF-2
Condensate	Blue Diamond Advanced Mini Condensate Pump w Reservoir Sensor 208230V recommended	X87-721
	Blue Diamond MaxiBlue Advanced Mini Condensate Pump w Reservoir Sensor 110V up to 48000 BTUH recommended	X87-711
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	X87-835
	Blue Diamond MegaBlue Advanced Condensate Pump w Reservoir Sensor	SI30-230
	Blue Diamond Sensor Extension Cable 15 Ft	C13-103
	Refco Condensate Pump 100-240 VAC up to 120000 BTUH	COMBI
Wired Remote Controller	Deluxe MA Wired Remote Controller	PAR-42MAAUB
	Simple Direct Wired Remote Controller	PAC-SDW01RC-1
	Simple MA Remote Controller	PAC-YT53CRAU-J
	Touch MA Wired Remote Controller	PAR-CT01MAU-SB
Power Supplies & Auxiliary Components	3-Pin Wiring Harness	PAC-715AD
	5-Pin Wiring Harness	PAC-725AD
	ERV On/Off Input Adapter for CNER on SVZ PEAD and PVA models	PAC-740
Port Adaptor	Adaptor 1/2 x 5/8 (required)	PAC-SK89RJ-E
	Adaptor 1/4 x 3/8 (required)	PAC-SJ87RJ-E
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	PAC-USSEN002-FM-1
	Wall Mount Remote Temperature Sensor	PAC-SE41TS-E
	Wireless temperature and humidity sensor for the Comfort app	PAC-USWHS003-TH-1
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	RCMKP1CB
	RedLINK Wireless Remote Controller	MHK2
	Universal Wireless MA Handheld Remote Controller	PAR-SL101A-E
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-W
	Universal Wireless Receiver for PAR-FL32MA-E	PAR-FA32MA-E
Disconnect Switch	30A600VUL fits 2 X 4 utility box - Black	TAZ-MS303
	30A600VUL fits 2 X 4 utility box - White	TAZ-MS303W
Power Supplies and Auxiliary Components	Backup Heat Relay Kit Adapter for CN24 or CN152 Connector	CN24RELAY-KIT-CM3
NOTES		

OUTDOOR UNIT ACCESSORIES: PUZ-AK24NLHZ

Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	SW144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	S144-50
Stand	18 Dual Fan Stand	QSMS1802M
	24 Dual Fan Stand	QSMS2402M
	Condenser Wall Bracket	QSWB2000M-1
	Condenser Wall Bracket - Stainless Steel Finish	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	DSD-400P
	Outdoor Unit Stand 12 High	QSMS1202M
Power Supplies & Auxiliary Components	3-Pin Wiring Harness	PAC-715AD
	5-Pin Wiring Harness	PAC-725AD
Control/Service Tool	ControlService Tool	PAC-SK52ST
	M- & P-Series Maintenance Tool Cable Set	M21EC0397
	Maintenance Tool Interface	PAC-USCMS-MN-1
Hail Guards	Hail Guard	HG-A2
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	ULTRILITE2
Drain Socket	Drain Socket	PAC-SG61DS-E
Air Outlet Guide	Air Outlet Guide 1 Piece	PAC-SH96SG-E (two pieces are required)
Wind Baffle	Front Wind Baffle	WB-PA3 (two pieces are required)
Snow/Rain Diverter	SnowRain Diverter	SRD-5
Centralized Drain Pan	Centralized Drain Pan	PAC-SH97DP-E
M-NET Converter	M-Net Interface for P-Series	PAC-SJ95MA-E
NOTES		

INDOOR UNIT DIMENSIONS: PAA-AA18NL

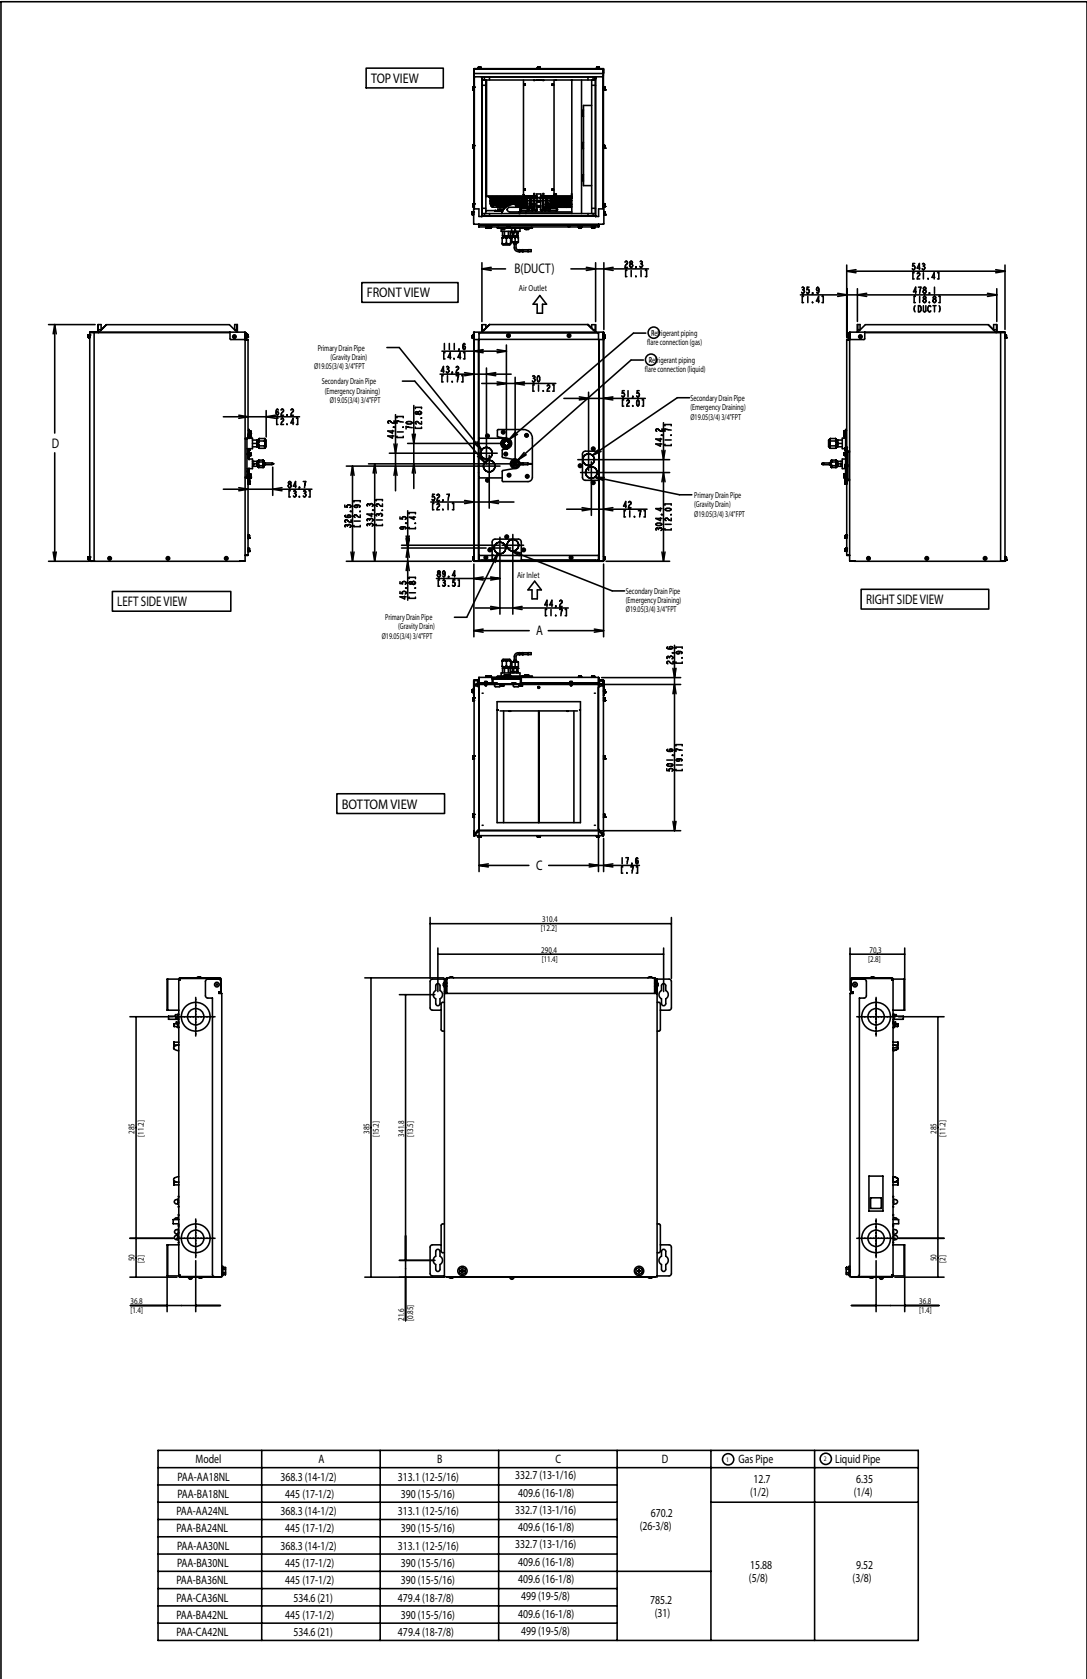

METUS 2025-08 PROPIN

AHRI CERTIFIED®
www.ahridirectory.org

Unitary Small HP
AHRI Standard 210/240

Certification applies only when the condensing system is listed with AHRI.



© 2025 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.