


PLA-AE36NL
36,000 BTU/H CEILING CASSETTE INDOOR UNIT



Job Name:

System Reference:

Date:

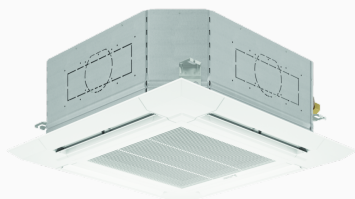

GENERAL FEATURES

- **3D i-see Sensor® (Built-in):** This advanced sensor scans the room for occupancy, then adjusts temperature and airflow based on user preferences, and saves energy when a room is empty.
- **Swing Mode:** An indoor unit with this capability can move air throughout the room like an oscillating fan.
- **Light Commercial:** Light commercial applications include small offices, restaurants, and retail.
- **Horizontal Vane Control:** Horizontal Vane Control allows the indoor unit vanes to be moved left right to provide even temperatures throughout a space.
- **Ventilation Air Intake:** A duct opening is provided, which allows outside air to be brought inside so it can be heated or cooled.
- **Condensate Lift Mechanism:** A built-in condensate lift mechanism removes water that is collected during operation and reduces the need for an additional pump to remove condensate water.

SPECIFICATIONS			SYSTEM
UNIT TYPE			PLA-AE36NL
Cooling Capacity (Nominal) ^{1,3}	Cooling Capacity (Nominal)	Btu/h	36000
Heating Capacity (Nominal) ^{2,3}	Heating Capacity (Nominal)	Btu/h	38000
Electrical	Voltage, Phase, Frequency	V AC / V AC , ϕ , Hz	208 / 230 , 1 , 60
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
Indoor Unit	MCA	A	2
	MOCP	A	15
	Fan Motor Type		DC Motor
	Fan Motor Output	W	120
	Airflow Rate at Cooling, Dry	CFM	670 , 850 , 1020 , 1200
	Airflow Rate at Heating, Dry	CFM	670 , 850 , 1020 , 1200
	Sound Pressure Level [Cooling]	dB (A)	32 , 37 , 41 , 44
	Sound Pressure Level [Heating]	dB (A)	32 , 37 , 41 , 44
	Dual Barrier Coating on Heat Exchanger		No
	External Finish Color		1.0Y 9.2/0.2
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 33-1/16 x 11-3/4 [840 x 840 x 298]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	34-5/16 x 35-9/16 x 15 [871 x 903 x 381]
	Unit Weight	lbs [kg]	57 [26]
	Package Weight	lbs [kg]	82 [37]
Refrigerant	Type		R454B
Piping	Liquid Pipe Size O.D.	inch [mm]	3/8 [9.52]
	Gas Pipe Size O.D.	inch [mm]	5/8 [15.88]
Indoor Unit	Drain Pipe Size O.D.	inch [mm]	1-1/4 [32]

Notes

¹Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Nominal capacity only. Actual capacity output varies based on the system specific configuration

INDOOR UNIT ACCESSORIES: PLA-AE36NL

3D Flow	3D Total Flow Unit	☐	PLP-U160ELR-E
Casement	Multi-function casement	☐	PAC-SJ41TM-E
Condensate	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐	SI30-230
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐	COMBI
	Blue Diamond (MaxiBlue Advanced) Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	☐	X87-711
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐	X88-721
	Blue Diamond Sensor Extension Cable 15 Ft	☐	C13-103
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐	X87-835
Control Interface	Airzone Wireless Lite Controller Black	☐	AZZBSLITERN
	Thermostat Interface for 3rd Party Thermostats	☐	PAC-US445CN-1
	Airzone Wireless Think Controller White	☐	AZZBSTHINKRB
	Wireless Interface 2 for Comfrot app	☐	PAC-USWHS002-WF-2
	Procon BACnet® and Modbus® Interface	☐	PAC-UKPRC001-CN-1
	Airzone Wireless Lite Controller White	☐	AZZBSLITERB
	kumo station® for Comfort app	☐	PAC-WHS01HC-E
	Airzone Wireless Think Controller Black	☐	AZZBSTHINKRN
	Airzone Wired Blueface Controller White	☐	AZZBSBLUEZEROCB
	IT Extender	☐	PAC-WHS01IE-E
	Airzone Wired Blueface Controller Black	☐	AZZBSBLUEZEROCN
	Operation and Error Status Output Adapter	☐	PAC-SF40RM-E
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - White	☐	TAZ-MS303W
	30A600VUL fits 2 X 4 utility box - Black	☐	TAZ-MS303
Filter	High efficiency filter element (requires PAC-SJ41TM-E)	☐	PAC-SH59KF-E
Grille	Grille (3D i-See sensor panel)	☒	PLP-41EAEU
Lineset	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐	MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐	MPLS385812T-65
	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐	MPLS385812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 10 feet	☐	MPLS385812T-10
	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐	MPLS385812T-30
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐	MPLS385812T-100
N/A		☐	Unknown
Remote Sensor	Wireless temperature and humidity sensor for Comfort app	☐	PAC-USWHS003-TH-1
	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐	PAC-USSEN002-FM-1
	Wall Mounted Remote Temperature Sensor	☐	PAC-SE41TS-E
Shutter Plate	Air outlet shutter plate	☐	PAC-SJ37SP-E
Terminal Signal Adapter	3-Pin Wiring Harness	☐	PAC-715AD
	Backup Heat Relay Kit	☐	CN24RELAY-KIT-CM3
	5-Pin Wiring Harness	☐	PAC-725AD
Wired Remote Controller	Touch MA Remote Controller	☐	PAR-CT01MAU-SB
	Deluxe MA Wired Remote Controller	☐	PAR-42MAAUB
	Simple MA Remote Controller	☐	PAC-YT53CRAU-J
	Simple Direct Wired Remote Controller	☐	PAC-SDW01RC-1
Wireless Remote Controller	Wireless Remote Receiver Panel	☐	PAR-SR3LA-E
	Lockdown Bracket for Wireless Handheld Remote Controllers	☐	RCMKP1CB
	Wireless Remote Controller	☐	PAR-SL101A-E
	Wireless RedLINK™ Remote Controller	☐	MHK2
	Wireless signal receiver (corner panel) (for PAR-SL101A-E / PAR-FL32MA)	☐	PAR-SR4LU-E
Notes			

INDOOR UNIT DIMENSIONS: PLA-AE36NL

