S-MEXT-G06-M1-U-13LB & PUY-AK42NL
39,900 BTU/H PREMIUM UNDER FLOW IT COOLING INDOOR UNIT
42,000 BTU/H COOLING ONLY OUTDOOR UNIT

Job Name:			
System Reference:		**Date:**	

INDOOR Unit ... S-MEXT-G06-M1-U-13LB
OUTDOOR Unit ... PUY-AK42NL

INDOOR UNIT FEATURES

- Humidity Control: Control humidification and dehumidification setpoints against ambient conditions.
- Steam Humidifier: Equipped with modulating steam humidifier for advanced humidity control.
- Electric Heater: Aluminum element electric heater installed downstream of main cooling coil.
- Computer Room Air Conditioning (CRAC): Unit meets and exceeds DOE CMMS import requirements.
- Low GWP: R-454B system with continuous circulation to meet code requirements.
- Touch Screen Control Interface: Factory installed 7-inch touch screen display with intuitive navigation for operating and monitoring operation and alarm status.
- Multi-Unit Networking: Enhanced network functions that offer connection of up to 10 s-MEXT units, balancing unit operating hours (lead-lag and stand-by unit activation), and centralized control.
- Flash Memory Logging: Capable of storing up to 200 recorded events in flash memory to preserve data for easy servicing and troubleshooting. Available in absence of power supply.
- Safety Devices: Built-in automatic disconnect system with inputs for fire, refrigerant leak, water leak, and airflow loss detection.

OUTDOOR UNIT FEATURES

- Inverter Driven Compressor: Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- Blue Fin Coating: Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- Seacoast Protection: Designed to protect against the corrosive effects of environments that are in close proximity to the sea.
- Low Ambient Cooling: Low ambient cooling down to -40°F providing 100% capacity with front, side and rear wind baffle kit
- Low Ambient Cooling: Low ambient cooling down to 0°F providing 100% capacity with front wind baffle kit

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

SPECIFICATIONS: S-MEXT-G06-M1-U-13LB & PUY-AK42NL

Cooling Capacity	Total Cooling Capacity	Btu/h [kW]	39900 [11.69]
	Net Cooling Capacity	Btu/h [kW]	39100 [11.46]
	Sensible Cooling Capacity	Btu/h [kW]	36700 [10.75]
	Net Sensible Capacity	Btu/h [kW]	31390 [9.2]
Efficiency	Net SCOP		3
	Maximum Static Pressure		2.37
Electrical	Voltage, Phase, Frequency	V AC / V AC , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	208 - 230
	Short-circuit Current Rating [SCCR]	kA	5
Indoor Unit	MCA	A	31
	MOCP	A	35
	Fan Motor Type		EC Motor
	Rated Airflow, Dry	CFM	1530
	Sound Pressure Level		60
	Sound Power Level		76
	Drain Pipe Size O.D.	inch [mm]	7/8 [22.23]
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	23-5/8 x 19-11/16 x 78 [600 x 500 x 1981]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	29-1/2 x 25-5/8 x 87-3/8 [749 x 651 x 2219]
	Unit Weight	lbs [kg]	212 [96]
	Package Weight	lbs [kg]	320 [145]
IDU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum]	deg F	95
	Cooling Intake Maximum Air Temp WB	deg F	72
	Cooling Intake Minimum Air Temp DB	deg F	66
	Cooling Intake Minimum Air Temp WB	deg F	57
	Heating Intake Air Temp [Maximum / Minimum]	deg F	115
	Heating Intake Minimum Air Temp DB	deg F	23
Outdoor Unit	MCA	A	34
	MOCP	A	56
	Fan Motor Output	W	74
	Airflow Rate Cooling	CFM	3910
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling[1]	dB (A)	52
	Compressor Type		Twin Rotary
	Compressor Model		MRB36FEGMC
	Compressor Oil [Type // Charge]	// oz	RM68EH // 45
	External Finish Color		Munsell 3Y 7.8/1.1
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 14 x 52-43/64 [1050 x 355 x 1338]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	42-15/16 x 17-3/4 x 58-5/16 [1090 x 450 x 1480]
	Unit Weight	lbs [kg]	224 [102]
	Package Weight	lbs [kg]	251 [114]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	F	115 / 23
	Cooling Thermal Lock-out / Re-start Temperatures**	F	N/A / N/A
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	9 , 14
	Maximum Pre-Charged Piping Length	ft [m]	100 [30]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0.6
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Maximum Piping Length	ft [m]	225 [69]
	Maximum Height Difference	ft [m]	100 [30]

Notes

[1]Cooling (Indoor // Outdoor) °F 75 DB, 52 DP (Upflow), 85 DB, 52 DP (Downflow) // 95 DB, 75 WB
*Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Cooling-only system with advanced wind baffle: -40°F - 115°F. • Refer to wind baffle documentation for further information.
**Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures):

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT ACCESSORIES: S-MEXT-G06-M1-U-13LB

S-MEXT Accessories	Plenum + 3 Grilles	☐ BL79900401
	Serial Card - RS485 - Pconet - Bacnet MS/TP	☐ T500000014
	Serial Card - RS485 - RS485Card - Modbus RTU	☐ T500000085
	Intake Free-Cooling Plenum	☐ BL79901101
	Damper With Spring Return	☐ T500000180
	Silenced Plenum + 1 Grille	☐ BL79900701
	Supply/Return Plenum	☐ BL79900201
	Serial Card - Ethernet - Pcoweb - Bacnet Over Ip/Snmp/Modbus TCP-IP + SMTP Email	☐ T500000087
	Silenced Plenum	☐ BL79900601
	Supply/Return Plenum - Class A1	☐ BL79900301
	Support Frame H 255-350mm	☐ BL79901201
	T/RH Air Probe	☐ T500000091
	Support Frame H 355-450mm	☐ BL79901301
	Plenum + 3 Grilles - Class A1	☐ BL79900501
	Support Frame H 400-510mm	☐ BL79901401
Notes		

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT ACCESSORIES: PUY-AK42NL

Air Outlet Guide	Air Outlet Guide 1 Piece	☐ PAC-SH96SG-E (two pieces required)
Control/Service Tool	Maintenance Tool Interface	☐ PAC-USCMS-MN-1
	M- & P-Series Maintenance Tool Cable Set	☐ M21EC0397
	ControlService Tool	☐ PAC-SK52ST
Drain Socket	Drain Socket	☐ PAC-SG61DS-E
Hail Guards	Hail Guard	☐ HG-A2
M-NET Converter	M-Net Interface for P-Series	☐ PAC-SJ95MA-E
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐ SW144-250
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐ S144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐ SW144-50
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐ S144-50
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	☐ ULTRILITE2
Snow/Rain Diverter	SnowRain Diverter	☐ SRD-5
Stand	18 Dual Fan Stand	☐ QSMS1802M
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐ DSD-400P
	24 Dual Fan Stand	☐ QSMS2402M
	Outdoor Unit Stand 12 High	☐ QSMS1202M
Terminal Signal Adapter	3-Pin Wiring Harness	☐ PAC-715AD
	5-Pin Wiring Harness	☐ PAC-725AD
Wind Baffle	Rear Wind Baffle	☐ WB-RE6
	Side Advanced Wind Baffle	☐ WB-SD6
	Front Wind Baffle	☐ WB-PA3 (two pieces required)
Notes		

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

INDOOR UNIT DIMENSIONS: S-MEXT-G06-M1-U-13LB

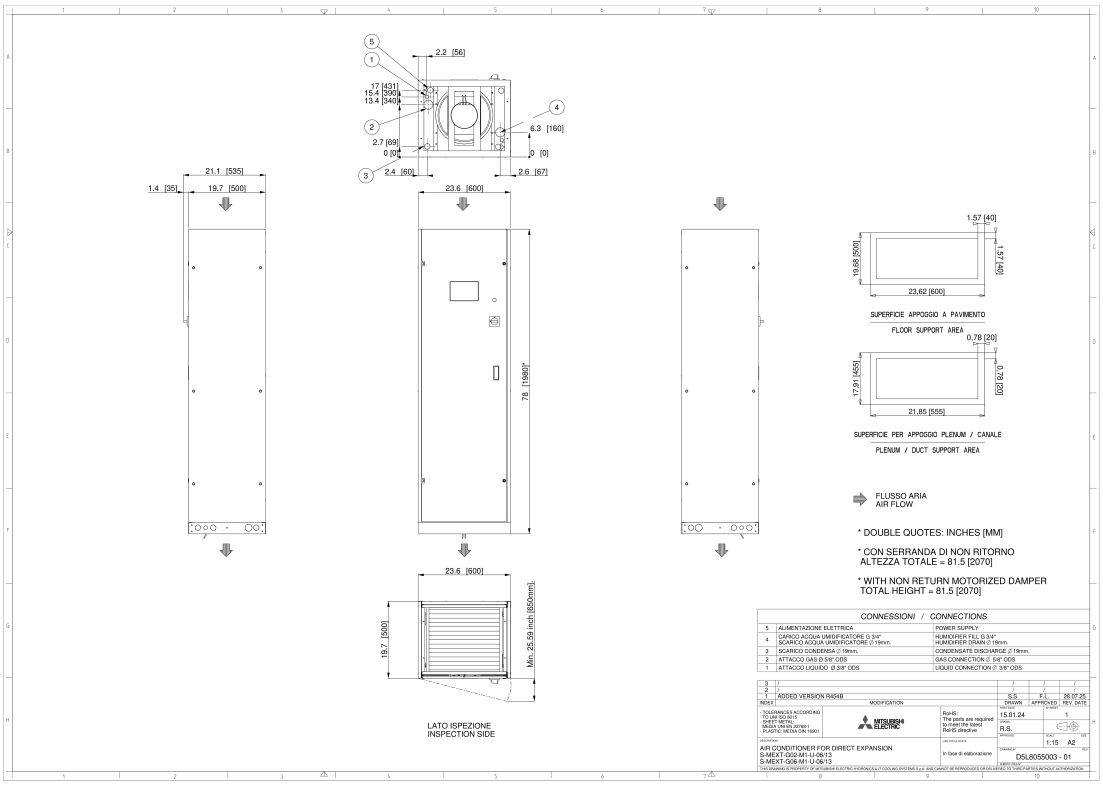

* CON SERRANDA DI NON RITORNO ALTEZZA TOTALE = 2070
* WITH NON RETURN MOTORIZED DAMPER TOTAL HEIGHT= 2070

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

OUTDOOR UNIT DIMENSIONS: PUY-AK42NL

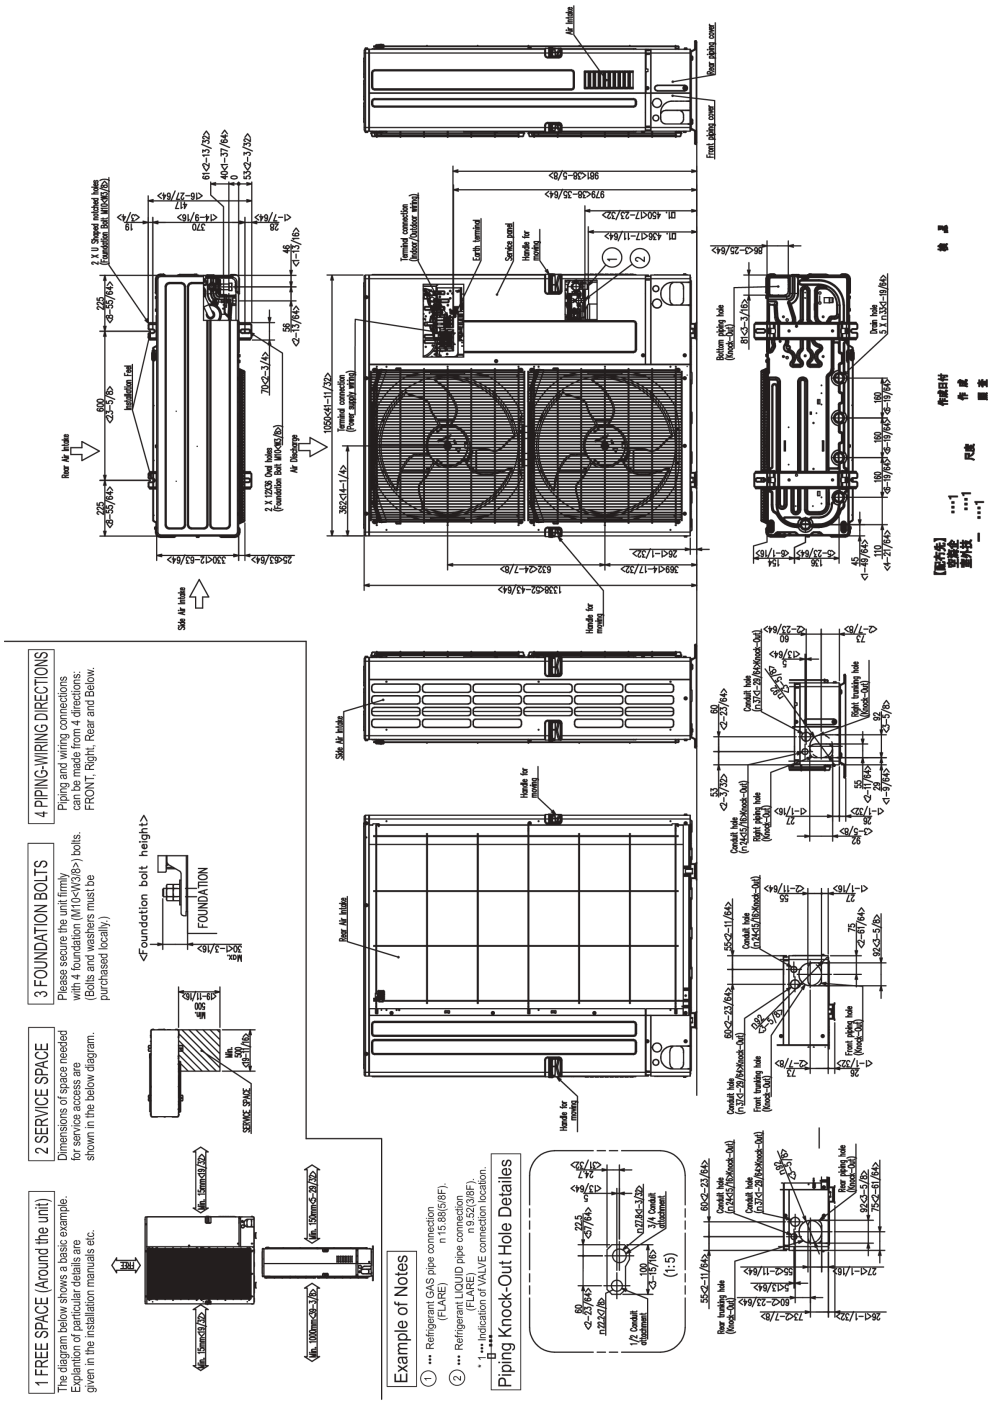

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-06_PROPIN

Specifications are subject to change without notice.

© 2026 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.